


ELECTRODEPOT

Contactor 934006

4 Pole Normally Closed

63A , 120VAC Coil

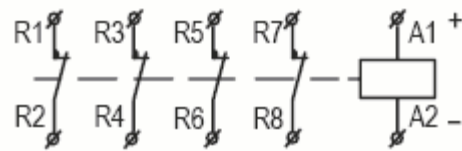

Application:


Lighting, Solar or Switching 24/120/220/277 V
Energy saving, Silent, No humming coil

Technical Specifications

- Contactor Rated Current IEC: 63A; Ue : 400V
- Contactor Type NC
- Full Load Amps-Inductive 30
- Full Load Amps-Resistive 60
- DC Load: 30A, @ 24VDC
- Power status indicator
- Number of Poles 4
- Coil Volts 120VAC, 50/60 Hz
- Coil load; Inrush 52VA, Sealed 10VA
- IEC AC Rate: AC-1; 16 kW, AC-3; 11 kW
- Electric strength: 4 kV
- Operating Temperature -30...+70 °C (-22...+158 °F)
- 1 HP @ 1 Phase - 120V
- 2 HP @ 1 Phase - 230V
- 5 HP @ 3 Phase - 208V
- 5 HP @ 3 Phase - 230V
- 10HP @ 3 Phase - 480V
- Weight: 0.88 lb (0.42 kg)
- CE approved 61095, UL pending
- DIN Rail 35mm mount

Wiring:

Solid Conductor: 25 mm² Max torque 0.6 Nm
Stranding Conductor: 16 mm², Max torque 0.6 Nm



Compliance:

CSA C22.2 No. 14, EN 60947-4-1, EN 60947-5-1, IEC 947-2, IEC 60947-4-1, IEC 60947-5-1, UL 508,